CATION PUBLISHED UNDER THE PATENT COLLERATION TREATY (PCT)

#### (19) World Intellectual Property Organization International Bureau

# 

### (43) International Publication Date 11 December 2003 (11.12.2003)

### **PCT**

## (10) International Publication Number WO 03/101264 A1

(51) International Patent Classification7: A47J 31/24, 31/38

(21) International Application Number: PCT/GB03/02400

(22) International Filing Date: 30 May 2003 (30.05.2003)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data: 0212710.8

31 May 2002 (31.05.2002)

(71) Applicant (for all designated States except US): PRESSO LIMITED [GB/GB]; 2 Huntsworth Mews, London NW1 6DD (GB).


- (72) Inventors; and
- (75) Inventors/Applicants (for US only): HUNT, Patrick,

Campbell [GB/GB]; 81 Medfield Street, London SW15 4JY (GB). RIDDIFORD, Martin, Philip [GB/GB]; 93 Calton Avenue, London SE21 7DF (GB).

- (74) Agent: GALLAFENT, Richard, John; Gallafent & Co, 9 Staple Inn, London WC1V 7QH (GB).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM). European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,

[Continued on next page]

(54) Title: APPARATUS FOR MAKING ESPRESSO COFFEE

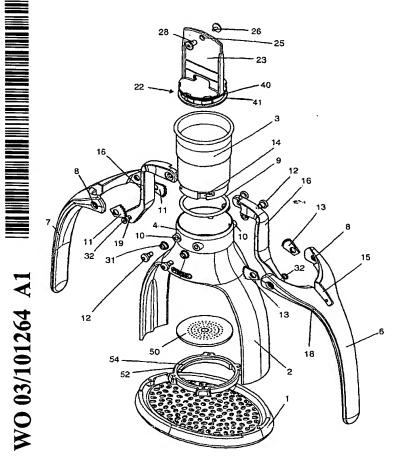

(57) Abstract: An apparatus for making espresso coffee is described. The apparatus comprises a support frame (2) upon which an open-topped cylinder (3) is vertically mounted. A pot containing a quantity of ground coffee may be attached to the base of the cylinder, and the frame (2) and cylinder (3) provide sufficient space to insert a cup or cups below the pot. A piston with a piston head (22) is adapted to fit in the cylinder (3) and a pair of levers (6, 7) pivoted to the frame and pivotally linked to the piston enable the piston head to move up and down in the cylinder (3) by actuation of the levers (6, 7). In use, hot water is poured into the cylinder (3) and downward pressure on the levers (6, 7) expels the hot water under pressure through the ground coffee and the freshly made coffee passes out of an outlet in the base of the pot and into a waiting cup.